

PVC Blow Shrink Film



Features

- ▶ With suitable softness ,and good for seaming and sleeving ,also help to save the waste rate.
- ▶ Environmental protection formula
- ▶ With less separate out of oil.
- ▶ With even thickness.
- ▶ Stable shrinkage rate.

Thickness	Width	TD	MD
30μm~70μm	360mm-1010mm	40%~53%±3%	0~5%±3%




www.dasesing.com
dasesing@dasesing.com

PVC Film Technical Data

Item	Unit	40U _m	
		TD	MD
Tensile Strength	Mpa	≥50.0	≥42.0
Tensile Elongation at break	%	≥50.0	≥70.0
Tear Propagation	mN	≥45.0	≥60.0
width & Deviation	mm	>360~500±3.0	
		>500±3.5	
Thickness Deviation	mm	±0.005	
Shrinkage & Deviation	%	42~53%	0~5%
		±3%	±3%
Heat shrinkage	50℃	0	0
	60℃	0	0
	70℃	6	0
	80℃	43	0
	90℃	50	1
	100℃	50	1

—■— TD —◆— MD

Heat Shrink Curve

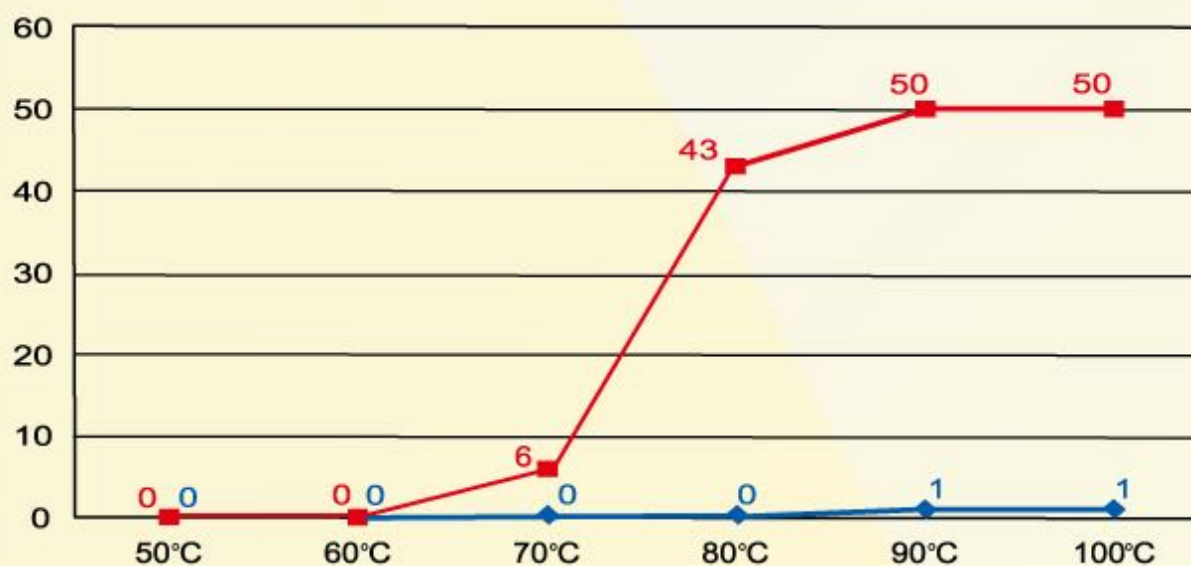

DASE-SING PACKAGING TECHNOLOGY CO., LTD.



Head Office /

+886.5.289.1306 +886.5.289.1212

No.7, Zhongzhuang, Shuishang Township, Chiayi Country 60857, Taiwan

Hsinchu Office /

+886.3.568.6478 +886.3.568.6375

No.465-1, Puding, Lin 18, Puhe Village, Xinfeng Township, Hsinchu Country 30446, Taiwan

Shanghai Office /

+86.21.3365.8333 +86.21.3365.8732

No.1189, Fengpu Dadau, Nanqiao Town, Fengxian, China. (Postal code: 201400)