


DASE-SING®

DASE-SING GROUP

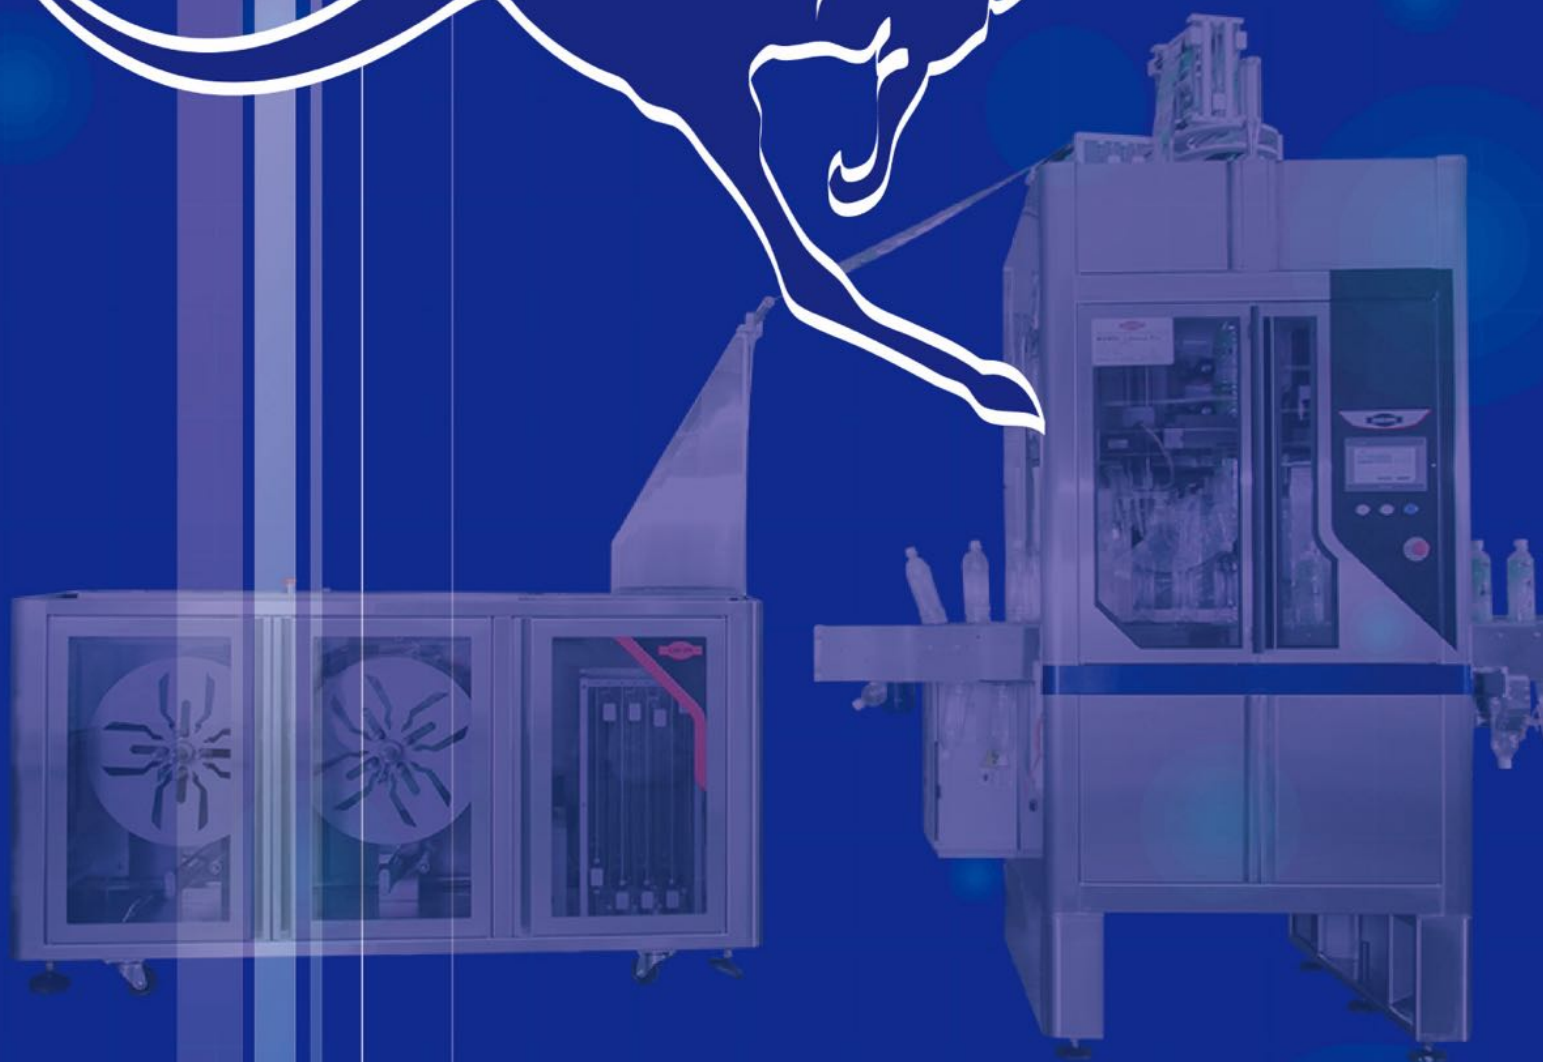


P SERIES

i-Sleeve Pro

AUTO SHRINK SLEEVE LABELLER

P SERIES

AUTO SHRINK SLEEVE LABELLER

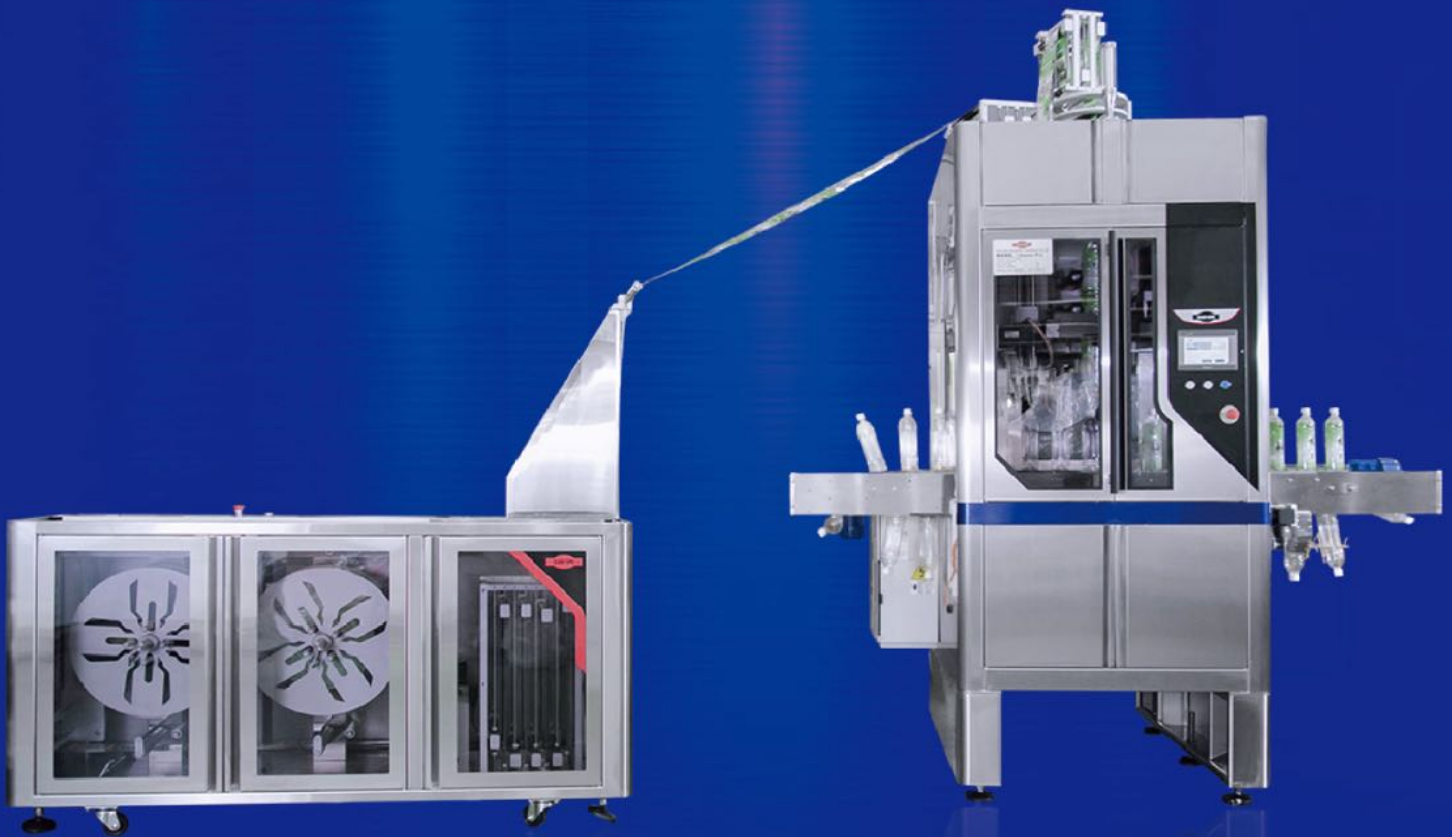

Insertion - Main Functions

- Square Bottle Insertion
- Curved Bottle Insertion
- Long Label Insertion
- Cup Shape Insertion
- Unique Type Insertion

The speed of above applications will depend on bottle and label design and quality conditions.

Distinctive Features:

1. Can use Ethernet communication or dry contact I/O control during production.
2. Safety guards and color touch panel control system ensure unit is user friendly.
3. Specially designed cutter plate does not need changing within rated specifications. If necessary, changes can be accomplished in only three minutes.
4. Use PC based control for increased accuracy and speed over conventional controls.
5. Servo control adopts Ethernet communication which is less susceptible to interference.

PACKAGING TYPES



Cap
Sealing Type



Overall
Bottle Type



Full Body
Labelling Type



Fixed Middle Body
Labelling Type



Underlap
Labelling Type



DASE-SING GROUP

The above images are protected by copyright. Any use without permission from Dase-Sing is strictly prohibited.

Distinctive Functions :

1. Can save up to 100 sets menu.
2. With optional UWI-8 Multi Label Unwinder, label changing time can be extended to increase productivity.
3. With optional i-ECO Steam Tunnel, steam wastage is avoided due to steam recycle function.
Thermostatically controlled, no need for steam piping, exhaust piping, and pressure reducing system.
Lower power consumption to achieve carbon reduction goal.
4. Using PET 20 micron or PVC 32 micron shrink labels at substantial film cost reduction, machine can reach 350bpm within 180mm label length.
5. Using PET/PVC 40 micron shrink labels, machine can reach 600bpm within 180mm label length.
6. With auto speed variation insertion capability to meet conveyor requirement.
7. Can be supplied with optional Bottle Lifter to produce quality packaging.



• With optional UWI-8 Multi Label Unwinder



• With optional i-ECO Steam Tunnel



• Can be supplied with optional Bottle Lifter

MODEL	i-Sleeve Pro
Power source	3P;220V,380V,415V,440V(Choose one from the given selections)
Production speed	Max: 600bpm/per 180mm label length with PET&PVC 40um The longer the length of the label, the slower the speed.
Machine Dimension	2410mm*1377mm*2799mm(L*W*H) (Based on 1200mm conveyor height from ground to top chain)
Power Consumption	16.53 KW
Cutter Plate Dimensions	[Ø25mm-Ø50mm],[Ø50mm~95mm],[Ø95mm~120mm](Choose one from given range)
Bottle Diameter	Ø25mm~Ø125mm(Based on customer provided bottle specs)
Label Material	PVC · PET · OPS
Label Thickness	PVC: 0.032mm~0.07mm PET:0.02 mm~0.06mm OPS:0.04 mm~0.06mm NOTE:Label thickness will affect machine speed.
Label Length	60mm-180mm(Customization can range from 25mm to 260mm)
Steam Shrink Tunnel	2.8m Steam Tunnel(1set)

Based on research improvement necessity, DASE-SING reserves the right to revise the machine design and specification without any notice.



www.dasesing.com
dasesing@dasesing.com



DASE-SING GROUP

■ **DASE-SING PACKAGING TECHNOLOGY CO., LTD.**

Head Office :

No.111-11, 1 Neighborhood, Zhongzhuang, Shuishang Township,
Chiayi County 60857, Taiwan

Tel: +886-5-289-1306 Fax: +886-5-289-1212

Hsinchu Office :

No.465-1, Puding, 18 Neighborhood, Puhe Village,
Sinfong Township, Hsinchu County 30446. Taiwan

Tel: +886-3-568-6478 Fax: +886-3-568-6375

■ **SHANGHAI DASE-SING PACKAGING TECHNOLOGY CO., LTD.**

No. 1189, Fengpu Dadau, Nanqiao Town, Fengxian, Shanghai, China.
(Postal code:201400)

TEL : +86-21-33658333 FAX : +86-21-33658732



dasesing@dasesing.com



www.dasesing.com